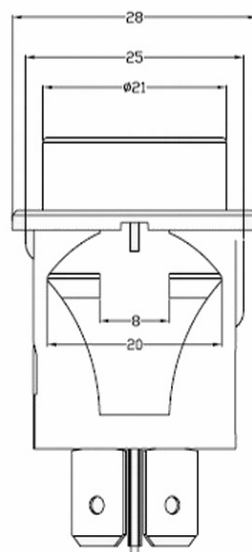
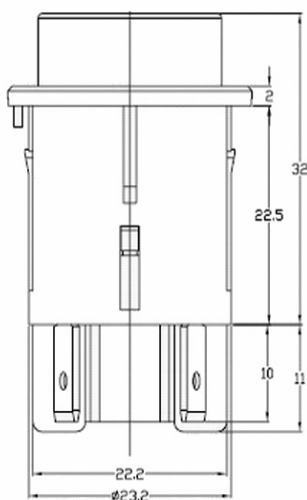
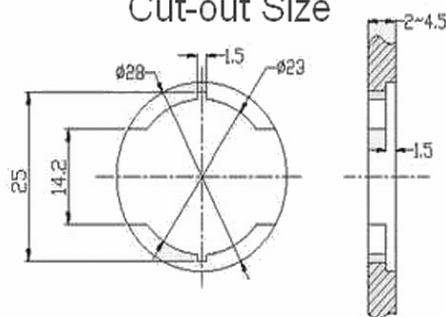


PUSH BUTTON 7087 SERIES



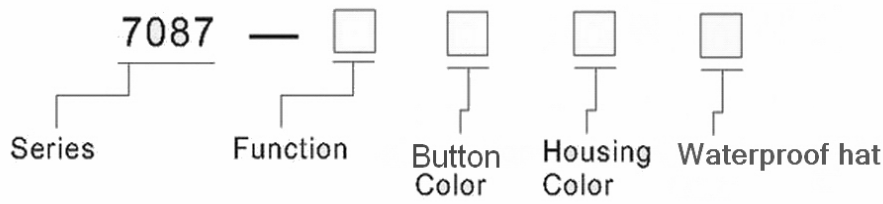
Cut-out Size







Technical parameters


Electrical parameters	16(6)A250Vac T125
Electrical life	10000cycles
Mechanical life	50000 cycles
Contact resistance	$\leq 50\text{m}\Omega$
Insulation Resistance	$\geq 100\text{m}\Omega$
Voltage withstand	1500Vac
Ambient temperature	0-125°C
Flammability	V-0
Fire resistance	850°C
Housing and Cap material	PA66
Contact material	Sliver Alloy
Terminal material	Brass Alloy
Approval Certification	SEMKO,CQC

How to order



Function option			
Function		Circuitry	Code
 1-2 OFF 3-4 OFF	Reseted		1
 1-2 ON 3-4 ON			
 1-2 OFF 3-4 OFF	Locked		2
 1-2 ON 3-4 ON			
 1-2 OFF 3-4 OFF	Reseted		3
 1-2 ON 3-4 ON			
 1-2 OFF 3-4 OFF	Locked		4
 1-2 ON 3-4 ON			
 OFF	Reseted		5
 ON			
 OFF	Locked		6
 ON			

Waterproof hat option		
Waterproof hat		Code
	with waterpoo hat	1
	No waterpoo hat	2

Housing color option	
Type	
1	

● Normal Black color or customized other color

Button color option	
Type	
1	Flat head with many colors 

Color code	
Color	Code
Red	1
Orange	2
yellow	3
Green	4
Blue	5
Gray	6
Purple	7
Brown	8
White	9
Black	10